

Simulation VIP for PCI

Overview

Cadence® Simulation VIP is the world’s most widely used VIP for digital simulation. Hundreds of customers have used Cadence VIP to verify thousands of designs, from IP blocks to full systems on chip (SoCs).

The Simulation VIP is ready-made for your environment, providing consistent results whether you are using Cadence Incisive®, Synopsys VCS®, or Mentor Questa® simulators. You have the freedom to build your testbench using any of these verification languages: SystemVerilog, e, Verilog, VHDL, or C/C++. Cadence Simulation VIP supports the Universal Verification Methodology (UVM) as well as legacy methodologies.


The unique flexible architecture of Cadence VIP makes this possible. It includes a multi-language testbench interface with full access to the source code to make it easy to integrate VIP with your testbench. Optimized cores for simulation and simulation-acceleration allow you to choose the verification approach that best meets your objectives.

Specification Support

The PCI VIP supports the PCI Protocol versions 1.0, 2.0, 2.1, 2.2 and 2.3, as defined in the PCI Protocol Specification.

Supported Design-Under-Test Configurations

- | | | |
|--|---|-------------------------------------|
| <input checked="" type="checkbox"/> Master | <input checked="" type="checkbox"/> Slave | <input type="checkbox"/> Hub/Switch |
| <input checked="" type="checkbox"/> Full Stack | <input type="checkbox"/> Controller-only | <input type="checkbox"/> PHY-only |

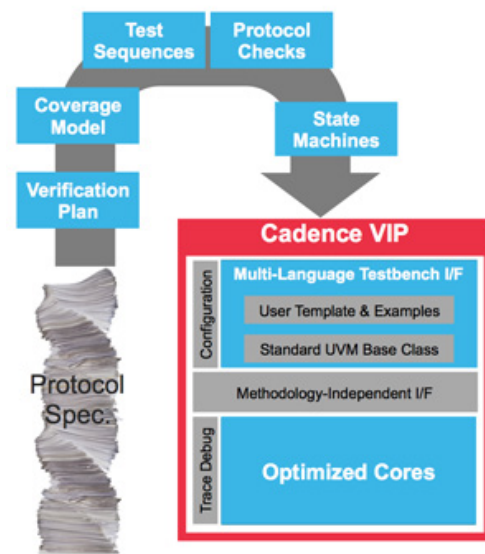

Deliverables

People sometimes think of VIP as just a bus functional model (BFM) that responds to interface traffic. But SoC verification requires much more than just a BFM. Cadence Simulation VIP components deliver:

- State machine models incorporate the subtle features of state machine behavior, such as support for multi-tiered, power-saving modes
- Pre-programmed assertions that are built into the VIP to continuously watch simulation traffic to check for protocol violations
- Test suites are provided for most Cadence VIP components
- Pre-programmed coverage models used to capture interesting combinations of simulation results. By analyzing the results collected by the coverage model, engineers can tell if the simulations have exercised the various modes of operation of an interface
- Verification plans for most protocols link the “raw” coverage model results back to the protocol specification

Key Features

- Supports both 32- and 64-bit bus data widths
- Supports multi-mastering and configurable number of target agents
- Supports power management registers
- Configurable number of functions is supported per device
- Supports optional 64-bit addressing
- Supports master arbitration
- Configurable number of optional interrupt pins is supported
- Supports lock feature
- Supports both linear and cache line wrap modes for both read and write
- All transaction termination types are supported: Completion, Master-Abort, Timeout, Retry, Disconnect with/without data, and Target-Abort

Test Suite

This VIP includes a basic test suite capability that includes:

- Constrained-random example tests
- 3rd party simulator test execution

Related Products

- PCIe Gen2 Simulation VIP
- PCIe Gen3 Simulation VIP
- PCIe Gen4 Simulation VIP
- PCIe SR-IOV Simulation VIP
- PCIe MR-IOV Simulation VIP
- PCIe Gen2/Gen 3 Accelerated VIP



Cadence Design Systems enables global electronic design innovation and plays an essential role in the creation of today's electronics. Customers use Cadence software, hardware, IP, and expertise to design and verify today's mobile, cloud, and connectivity applications. www.cadence.com

© 2014 Cadence Design Systems, Inc. All rights reserved worldwide. Cadence and the Cadence logo are registered trademarks of Cadence Design Systems, Inc. in the United States and other countries. All rights reserved. All other trademarks are the property of their respective owners.